


Description

Ball valve suited for liquids and steam.
Cylindrical full bore with floating ball valve.
PN64 with ISO-top flange.


Various actuators
Seating carbon filled PTFE

Other dimensions/materials on request

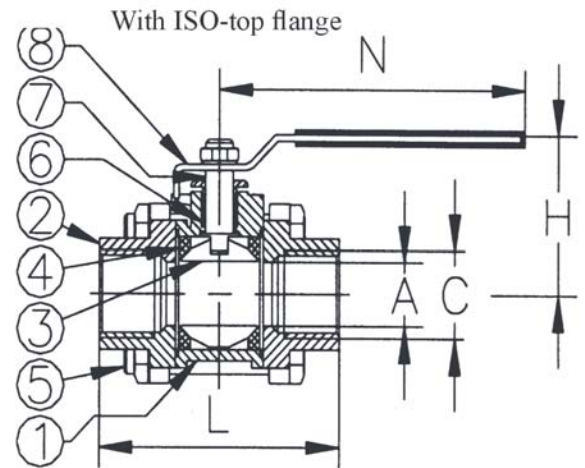

Materials and dimensions

No	Part	Material
1	Body	Stainless steel SS316
2		
3	Ball	Stainless steel SS316
4	Seating	PTFE 15% glasfibre
5	Bolt	Stainless steel SS304
6	Stem packing	PTFE
7	Stem	Stainless steel SS316
8	Lever	Stainless steel SS304
9	Butt weld end	Stainless steel SS316

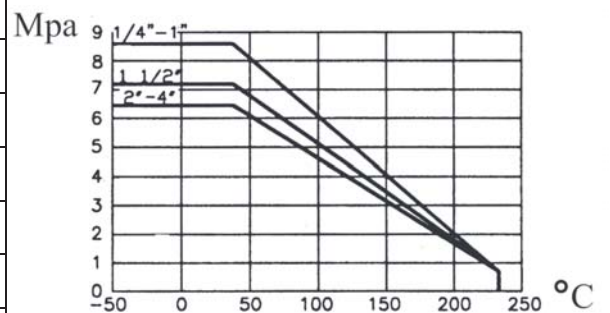

DN	A	C	N	L	H	Weight (kg)
8	11,5	17,5	117	64,5	57	0,4
10	12,7	17,5	117	64,5	57	0,5
15	15	22	117	66	57	0,6
20	20	27	137	83	69	0,9
25	25	34	157	95	80	1,2
32	32	42,5	157	111	85	2,1
40	38	48,5	185	131	95	2,8
50	50	61	200	151	110	4,4
65	65	73	285	186	135	8,4
80	80	92	285	212	148	13,3
100	100	115	315	235	170	19,5